




TEREX®

Utilities

COMMANDER 5000 SERIES

DIGGER DERRICK

Terex Telelect Digger Derricks are known throughout the industry. They come with a long history featuring quality and innovative design and features.

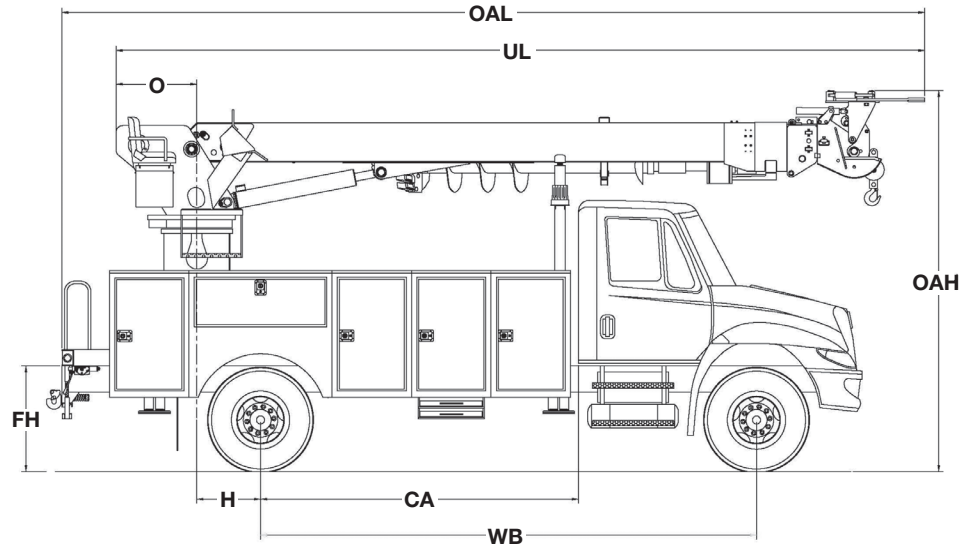

Measurements	Commander 5048			Commander 5050			Commander 5052			Commander 5055		
	ORA	BC	CMT	ORA	BC	CMT	ORA	BC	CMT	ORA	BC	CMT
<i>(Minimum Recommendations)</i>												
Frame Height (G)	40 in. (101.6 cm)			40 in. (101.6 cm)			40 in. (101.6 cm)			40 in. (101.6 cm)		
Offset (O)	30.5 in. (77.5 cm)			30.5 in. (77.5 cm)			30.5 in. (77.5 cm)			30.5 in. (77.5 cm)		
Overall Height (OAH)	12' 0" (3.7 m)	12' 0" (3.7 m)	11' 2" (3.4 m)	12' 0" (3.7 m)	12' 0" (3.7 m)	11' 2" (3.4 m)	12' 0" (3.7 m)	12' 0" (3.7 m)	11' 2" (3.4 m)	12' 0" (3.7 m)	12' 0" (3.7 m)	11' 2" (3.4 m)
Overall Length (OAL) <i>OAH measurements based on 62" cab height</i>	26' 8" (8.1 m)	34' 4" (10.5 m)	25' 4" (7.7 m)	26' 8" (8.1 m)	34' 4" (10.5 m)	25' 4" (7.7 m)	26' 8" (8.1 m)	34' 4" (10.5 m)	25' 4" (7.7 m)	29' 8" (9.0 m)	37' 4" (11.4 m)	28' 4" (8.6 m)
Unit Length (UL)	25' 6" (7.8 m)			25' 6" (7.8 m)			25' 6" (7.8 m)			28' 6" (8.7 m)		
Center of Rotation (H)	24 in. (61 cm)	111.5 in. (283.2 cm)	61 in. (155 cm)	24 in. (61 cm)	111.5 in. (283.2 cm)	61 in. (155 cm)	24 in. (61 cm)	111.5 in. (283.2 cm)	61 in. (155 cm)	24 in. (61 cm)	111.5 in. (283.2 cm)	61 in. (155 cm)
Cab to Axle (CA)	120 in. (304.8 cm)	138 in. (350 cm)	102 in. (259 cm)	120 in. (304.8 cm)	138 in. (350 cm)	102 in. (259 cm)	120 in. (304.8 cm)	138 in. (350 cm)	102 in. (259 cm)	120 in. (304.8 cm)	150 in. (381 cm)	102 in. (259 cm)
Wheel Base (WB)	192 in. (487.7 cm)	210 in. (533.4 cm)	174 in. (442 cm)	192 in. (487.7 cm)	210 in. (533.4 cm)	174 in. (442 cm)	192 in. (487.7 cm)	210 in. (533.4 cm)	174 in. (442 cm)	192 in. (487.7 cm)	222 in. (563.9 cm)	174 in. (442 cm)
Front Axle (GAWR)	12,000 lb. (5,443 kg)			12,000 lb. (5,443 kg)			12,000 lb. (5,443 kg)			12,000 lb. (5,443 kg)		
Rear Axle (GAWR)	21,000 lb. (9,525 kg)	21,000 lb. (9,525 kg)	34,000 lb. (15,422 kg)	21,000 lb. (9,525 kg)	21,000 lb. (9,525 kg)	34,000 lb. (15,422 kg)	21,000 lb. (9,525 kg)	21,000 lb. (9,525 kg)	34,000 lb. (15,422 kg)	21,000 lb. (9,525 kg)	21,000 lb. (9,525 kg)	34,000 lb. (15,422 kg)
Gross Vehicle Weight Rating (GVWR)	33,000 lb. (14,969 kg)	33,000 lb. (14,969 kg)	46,000 lb. (20,865 kg)	33,000 lb. (14,969 kg)	33,000 lb. (14,969 kg)	46,000 lb. (20,865 kg)	33,000 lb. (14,969 kg)	33,000 lb. (14,969 kg)	46,000 lb. (20,865 kg)	33,000 lb. (14,969 kg)	33,000 lb. (14,969 kg)	46,000 lb. (20,865 kg)
Recommend Weight For Stability	25,000 lb. (11,340 kg)			25,000 lb. (11,340 kg)			25,500 lb. (11,567 kg)			25,500 lb. (11,567 kg)		
Frame Section Modulus	18.0 in ³			18.0 in ³			18.0 in ³			18.0 in ³		
Frame Yield Strength	50,000 psi			50,000 psi			50,000 psi			50,000 psi		
Frame RBM	900,000 in-lbs			900,000 in-lbs			900,000 in-lbs			900,000 in-lbs		




TEREX®
Utilities

500 Oakwood Drive
PO BOX 1150
Watertown, SD 57201-6150
USA

Phone: (605) 882-4000
Facsimile: (605) 882-1842
www.terexutilities.com
E-mail: sales@terexutilities.com

Distributed By:

COMMANDER 5000 SERIES

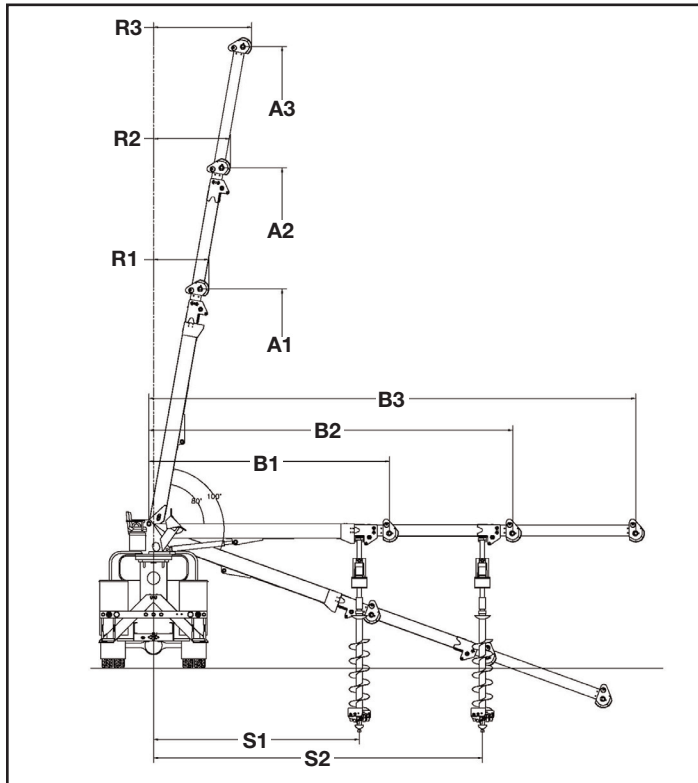

STANDARD EQUIPMENT

- 100 Degrees of Boom Travel (+80 to -20)
- 50 Gallon Hydraulic Oil Reservoir
- Boom Angle Indicator
- Boom Interlock
- Box Fabricated Steel Lower Boom and Intermediate
- Continuous Unrestricted Planetary Gear Rotation
- Continuous Unrestricted Rotation
- Custom Made Zoned Load Chart
- Dual Handle Rack Controls
- Dual Lift Cylinders
- Fiberglass Hydraulic Upper Boom
- Full Pressure Hydraulic Controls
- Meets or Exceeds ANSI A10.31
- Open Center Hydraulic System
- Outrigger Moving Alarm
- Planetary Winch
- Self-Aligning Swivel Ball Bushings
- Steel Hydraulic Intermediate
- Transferable Pole Buddy
- 15,000 lb. Turntable Winch

CAPACITIES & DIMENSIONAL DATA

Model	Maximum Capacity	Capacity @ 10 ft Radius	Load Radius			Sheave Height			Horizontal Reach			Digging Radius	
			R1	R2	R3	A1	A2	A3	B1	B2	B3	S1	S2
CMDR 5048													
TM Winch	30,000 lb (13,608 kg)	15,350 lb (6,963 kg)	3.4 ft (1.0 m)	5.0 ft (1.5 m)	6.6 ft (2.0 m)	30.8 ft (9.4 m)	39.7 ft (12.1 m)	48.6 ft (14.8 m)	21.1 ft (6.4 m)	30.1 ft (9.2 m)	39.1 ft (11.9 m)	18.1 ft (5.5 m)	27.1 ft (8.2 m)
Boom Tip Winch	27,860 lb (12,637 kg)	13,700 lb (6,214 kg)	4.0 ft (1.2 m)	5.6 ft (1.7 m)	6.5 ft (2.0 m)	29.9 ft (9.1 m)	38.7 ft (11.8 m)	48.0 ft (14.6 m)	20.2 ft (6.2 m)	29.2 ft (8.9 m)	38.5 ft (11.7 m)	18.1 ft (5.5 m)	27.1 ft (8.2 m)
CMDR 5050													
TM Winch	30,000 lb (13,608 kg)	15,300 lb (6,940 kg)	3.4 ft (1.0 m)	5.2 ft (1.6 m)	7.0 ft (2.1 m)	30.8 ft (9.4 m)	40.7 ft (12.4 m)	50.0 ft (15.4 m)	21.1 ft (6.4 m)	31.1 ft (9.5 m)	41.1 ft (12.5 m)	18.1 ft (5.5 m)	28.1 ft (8.5 m)
Boom Tip Winch	27,820 lb (12,619 kg)	13,650 lb (6,192 kg)	4.0 ft (1.2 m)	5.7 ft (1.7 m)	6.9 ft (2.1 m)	29.9 ft (9.1 m)	39.7 ft (12.1 m)	49.9 ft (15.2 m)	20.2 ft (6.2 m)	30.2 ft (9.2 m)	40.5 ft (12.3 m)	18.1 ft (5.5 m)	28.1 ft (8.5 m)
CMDR 5052													
TM Winch	30,000 lb (13,608 kg)	15,260 lb (6,922 kg)	3.4 ft (1.0 m)	5.3 ft (1.6 m)	7.3 ft (2.2 m)	30.8 ft (9.4 m)	41.7 ft (12.7 m)	52.5 ft (16.0 m)	21.1 ft (6.4 m)	32.1 ft (9.8 m)	43.1 ft (13.1 m)	18.1 ft (5.5 m)	29.1 ft (8.8 m)
Boom Tip Winch	27,790 lb (12,606 kg)	13,600 lb (6,169 kg)	4.0 ft (1.2 m)	5.9 ft (2.0 m)	7.2 ft (2.2 m)	29.9 ft (9.1 m)	40.7 ft (12.4 m)	51.9 ft (15.8 m)	20.2 ft (6.2 m)	31.2 ft (9.5 m)	42.5 ft (13.0 m)	18.1 ft (5.5 m)	29.1 ft (8.8 m)
CMDR 5055													
TM Winch	30,000 lb (13,608 kg)	14,400 lb (6,532 kg)	3.9 ft (1.2 m)	5.9 ft (1.8 m)	7.9 ft (2.4 m)	33.8 ft (10.3 m)	44.6 ft (13.6 m)	55.5 ft (16.9 m)	24.1 ft (7.3 m)	35.1 ft (10.7 m)	46.1 ft (14.1 m)	21.1 ft (6.4 m)	32.1 ft (9.8 m)
Boom Tip Winch	24,300 lb (11,022 kg)	12,850 lb (5,829 kg)	4.5 ft (1.4 m)	6.4 ft (2.0 m)	7.8 ft (2.4 m)	32.8 ft (10.0 m)	43.6 ft (13.3 m)	54.9 ft (16.7 m)	23.2 ft (7.1 m)	34.2 ft (10.4 m)	45.5 ft (13.9 m)	21.1 ft (6.4 m)	32.1 ft (9.8 m)

OPTIONAL EQUIPMENT

- Diggers/Augers
- Fiberglass Personnel Platform
- Full Pressure Upper Controls
- Hydraulic Overload Protection (HOP)
- Material Handling Jibs
- Pole Puller
- Pole Guide
- Various Types of Outriggers
- Auger Storage on Right Side
- Boom Tip Winch
- Command Post Operator Controls
- Hydraulic Tool Outlets at Upper Controls
- Manual Fiberglass 4th Section (Adds 4 Feet)
- Multi-Part Line Components
- Radio Remote Controls
- Single Stick "T" Control
- Start/Stop and Throttle Advance at Top Controls
- Various Types of Controls
- Corner Mount Derrick

Effective Date: March 1, 2007. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. "TEREX" is a registered trademark of Terex Corporation in the USA and many other countries. Copyright © 2007 Terex Corporation.